


Minimum Flow: 0.0 USG/H

MAWP Head: 4,000 PSIG

— Minimum Flow

— Maximum Flow

316L Head MAWP indicated by maximum depicted on chart. Motor: 12VDC Variable Speed, 6-67 RPM, 150 lbf-in, 5/8" shaft, NEC Class 1 Division 2. Rod Force: 200 lbf (0.89 kN). Stroke Length: 0-0.75 in (0-19.05 mm) Infinite Adjustment. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. This chart represents full power available to the motor. See ATP Solar Performance Tables for performance with source power limitations. All series ATP heads are dedicated to their respective plunger size. The flow rate shown is for a single head. The ATP drive is designed to accept up to two heads of any plunger size combination.

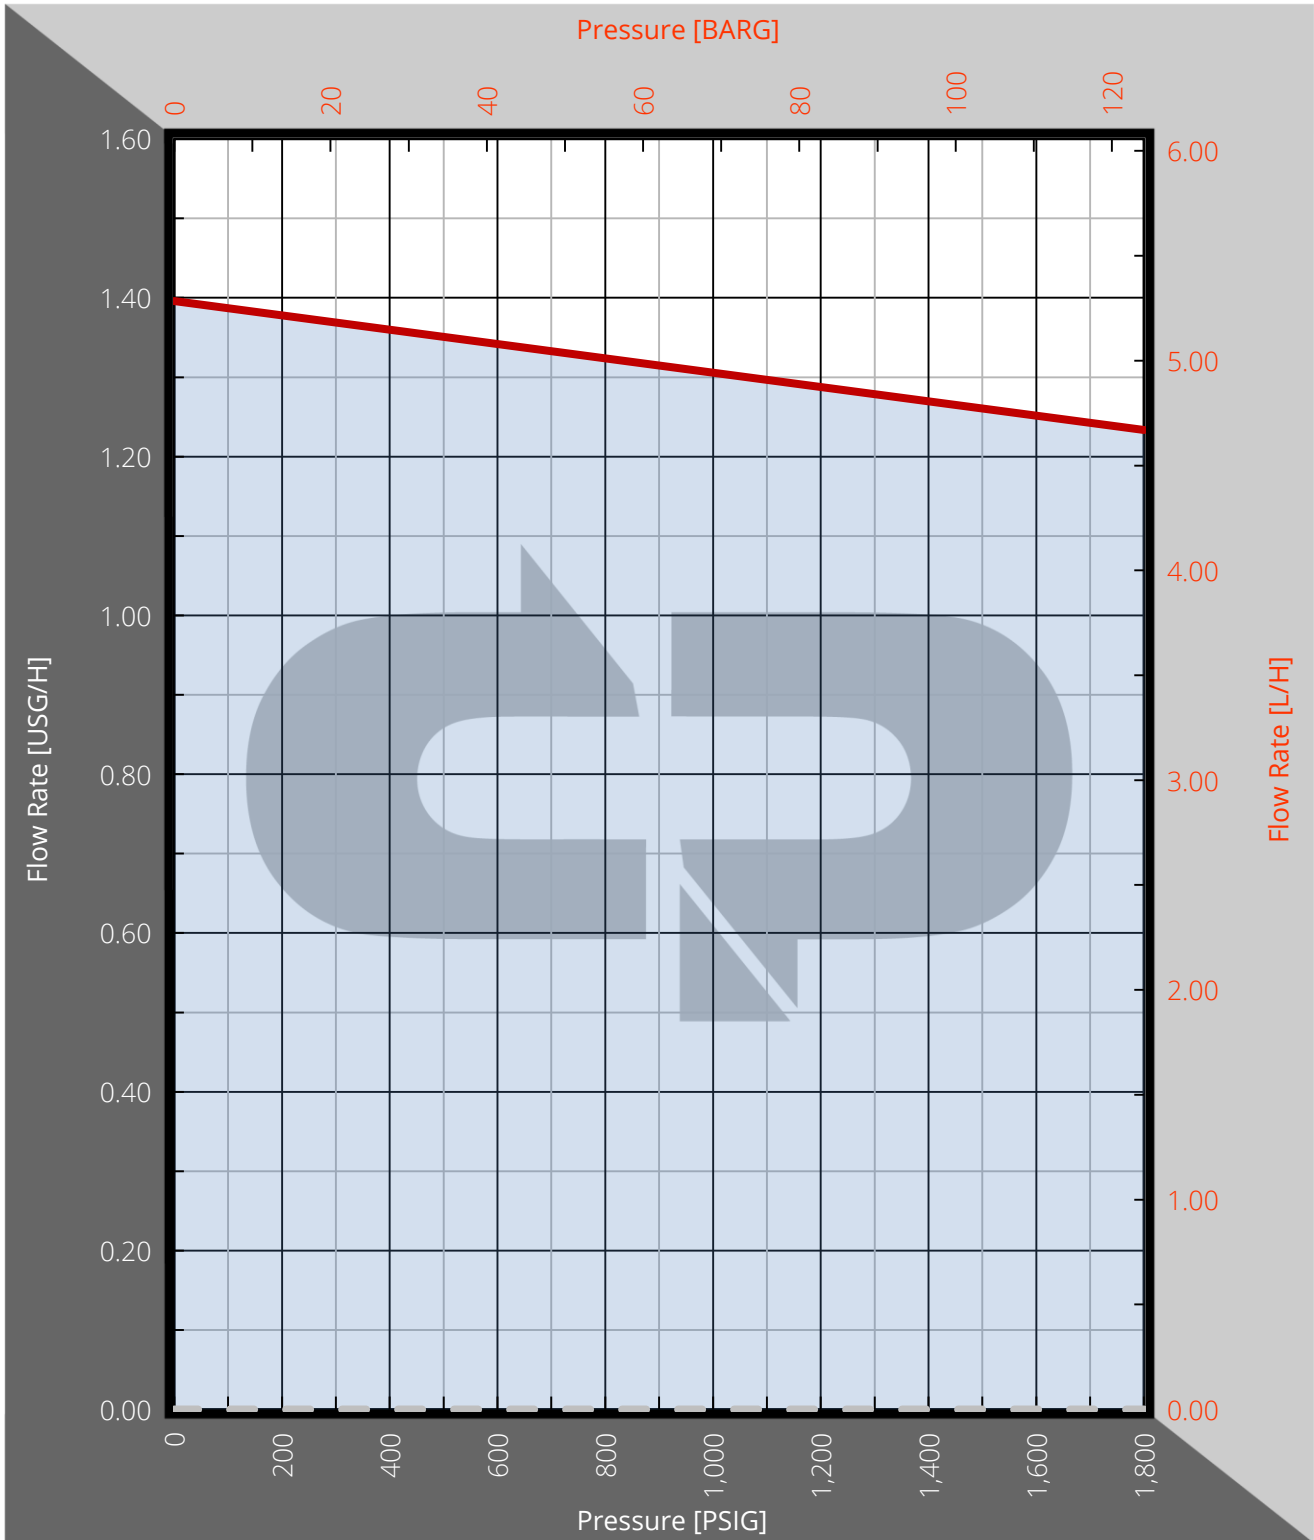


Minimum Flow: 0.0 USG/H

MAWP Head: 1,800 PSIG

— Minimum Flow

— Maximum Flow

316L Head MAWP indicated by maximum depicted on chart. Motor: 12VDC Variable Speed, 6-67 RPM, 150 lbf-in, 5/8" shaft, NEC Class 1 Division 2. Rod Force: 200 lbf (0.89 kN). Stroke Length: 0-0.75 in (0-19.05 mm) Infinite Adjustment. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. This chart represents full power available to the motor. See ATP Solar Performance Tables for performance with source power limitations. All series ATP heads are dedicated to their respective plunger size. The flow rate shown is for a single head. The ATP drive is designed to accept up to two heads of any plunger size combination.

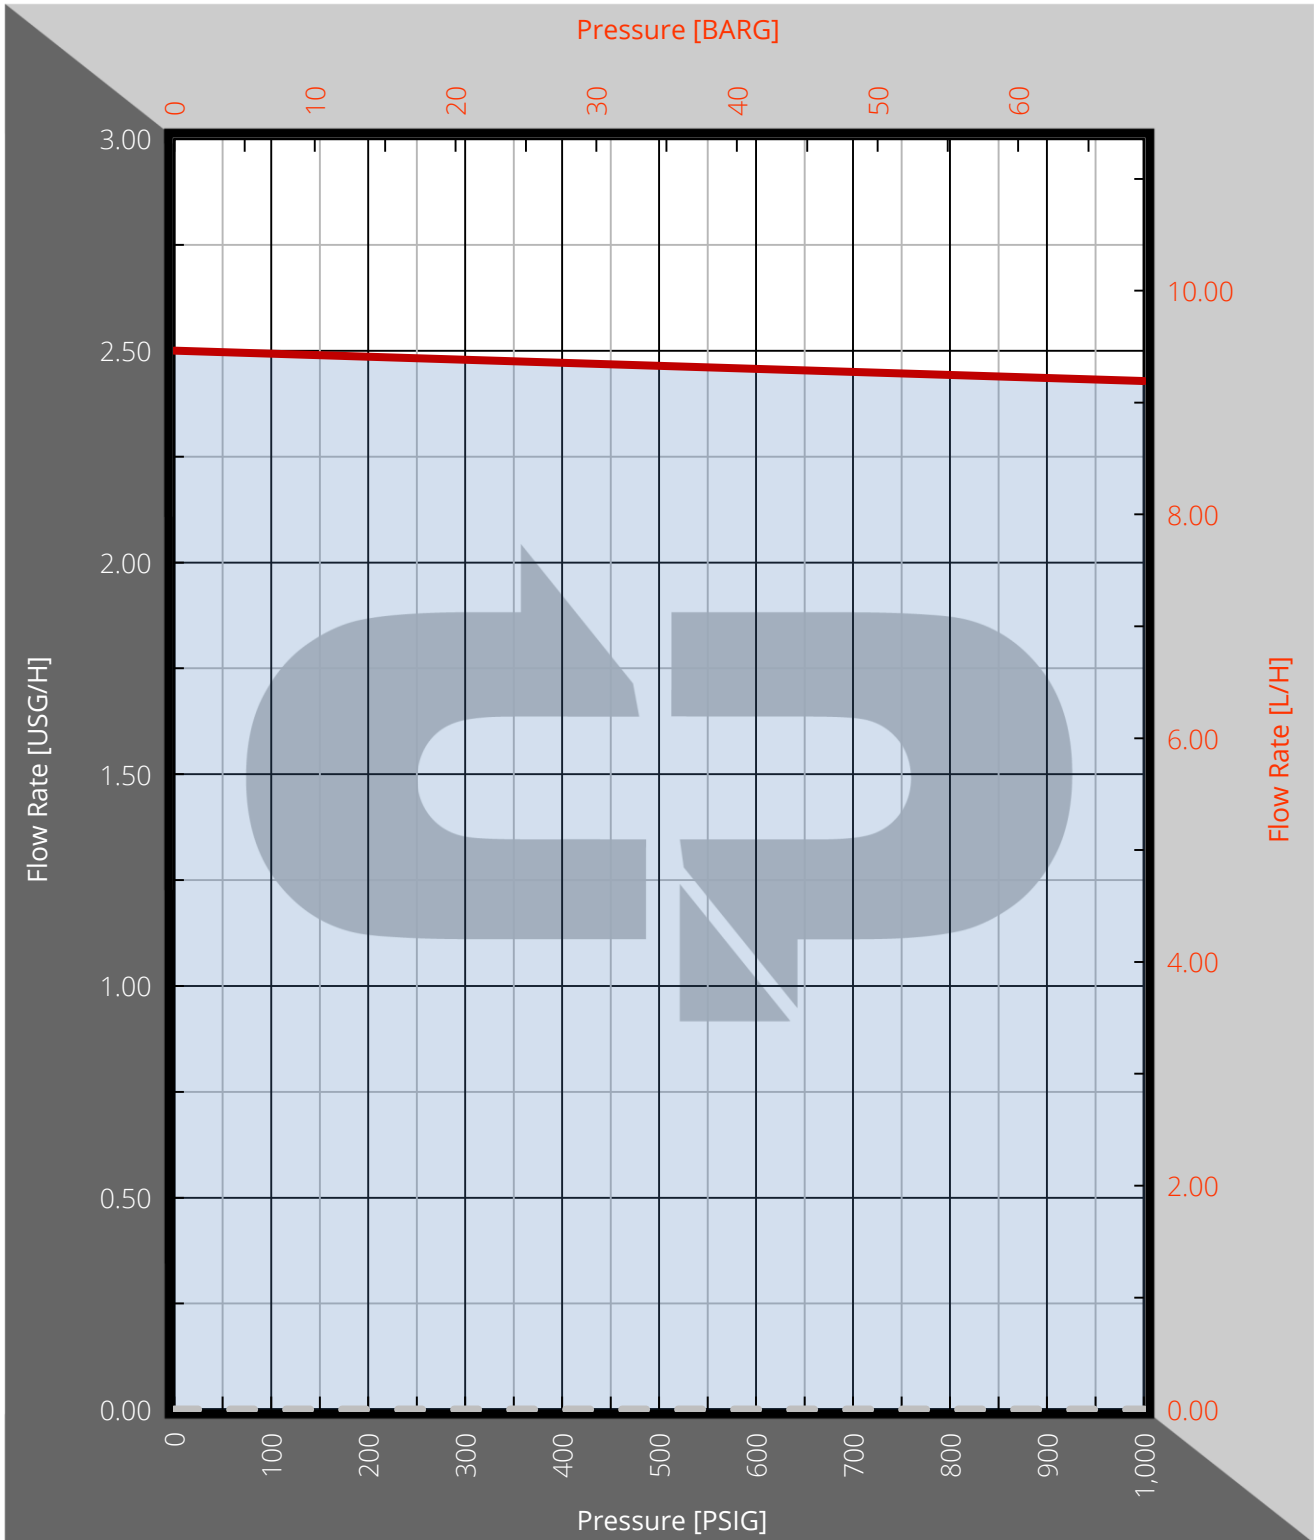

Minimum Flow: 0.0 USG/H

MAWP Head: 1,000 PSIG

— Minimum Flow

— Maximum Flow

316L Head MAWP indicated by maximum depicted on chart. Motor: 12VDC Variable Speed, 6-67 RPM, 150 lbf-in, 5/8" shaft, NEC Class 1 Division 2. Rod Force: 200 lbf (0.89 kN). Stroke Length: 0-0.75 in (0-19.05 mm) Infinite Adjustment. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. This chart represents full power available to the motor. See ATP Solar Performance Tables for performance with source power limitations. All series ATP heads are dedicated to their respective plunger size. The flow rate shown is for a single head. The ATP drive is designed to accept up to two heads of any plunger size combination.