



*For discharge pressures above 7,500 psig, a high pressure head configuration is needed.

MAWP 7,500 PSIG (517.2 BARG) Metallic Head / 300 PSIG (20.7 BARG) PVC Head / 12,000 PSIG (827.6 BARG) HP Metallic Head / 2,000 lbf (8.90 kN) Rod Force / 0.75 in (19.05 mm) Stroke Length / Motor Requirements: Inverter Duty 1000:1, Vertical / Available Frames: NEMA 56C with 7/8" shaft adapter, 143/145TC or IEC80B5. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. The metallic head version of this model features a modular head design that allows interchangeability with other plunger sizes with the appropriate parts. High pressure model pump heads are dedicated and do not accept other size plungers.

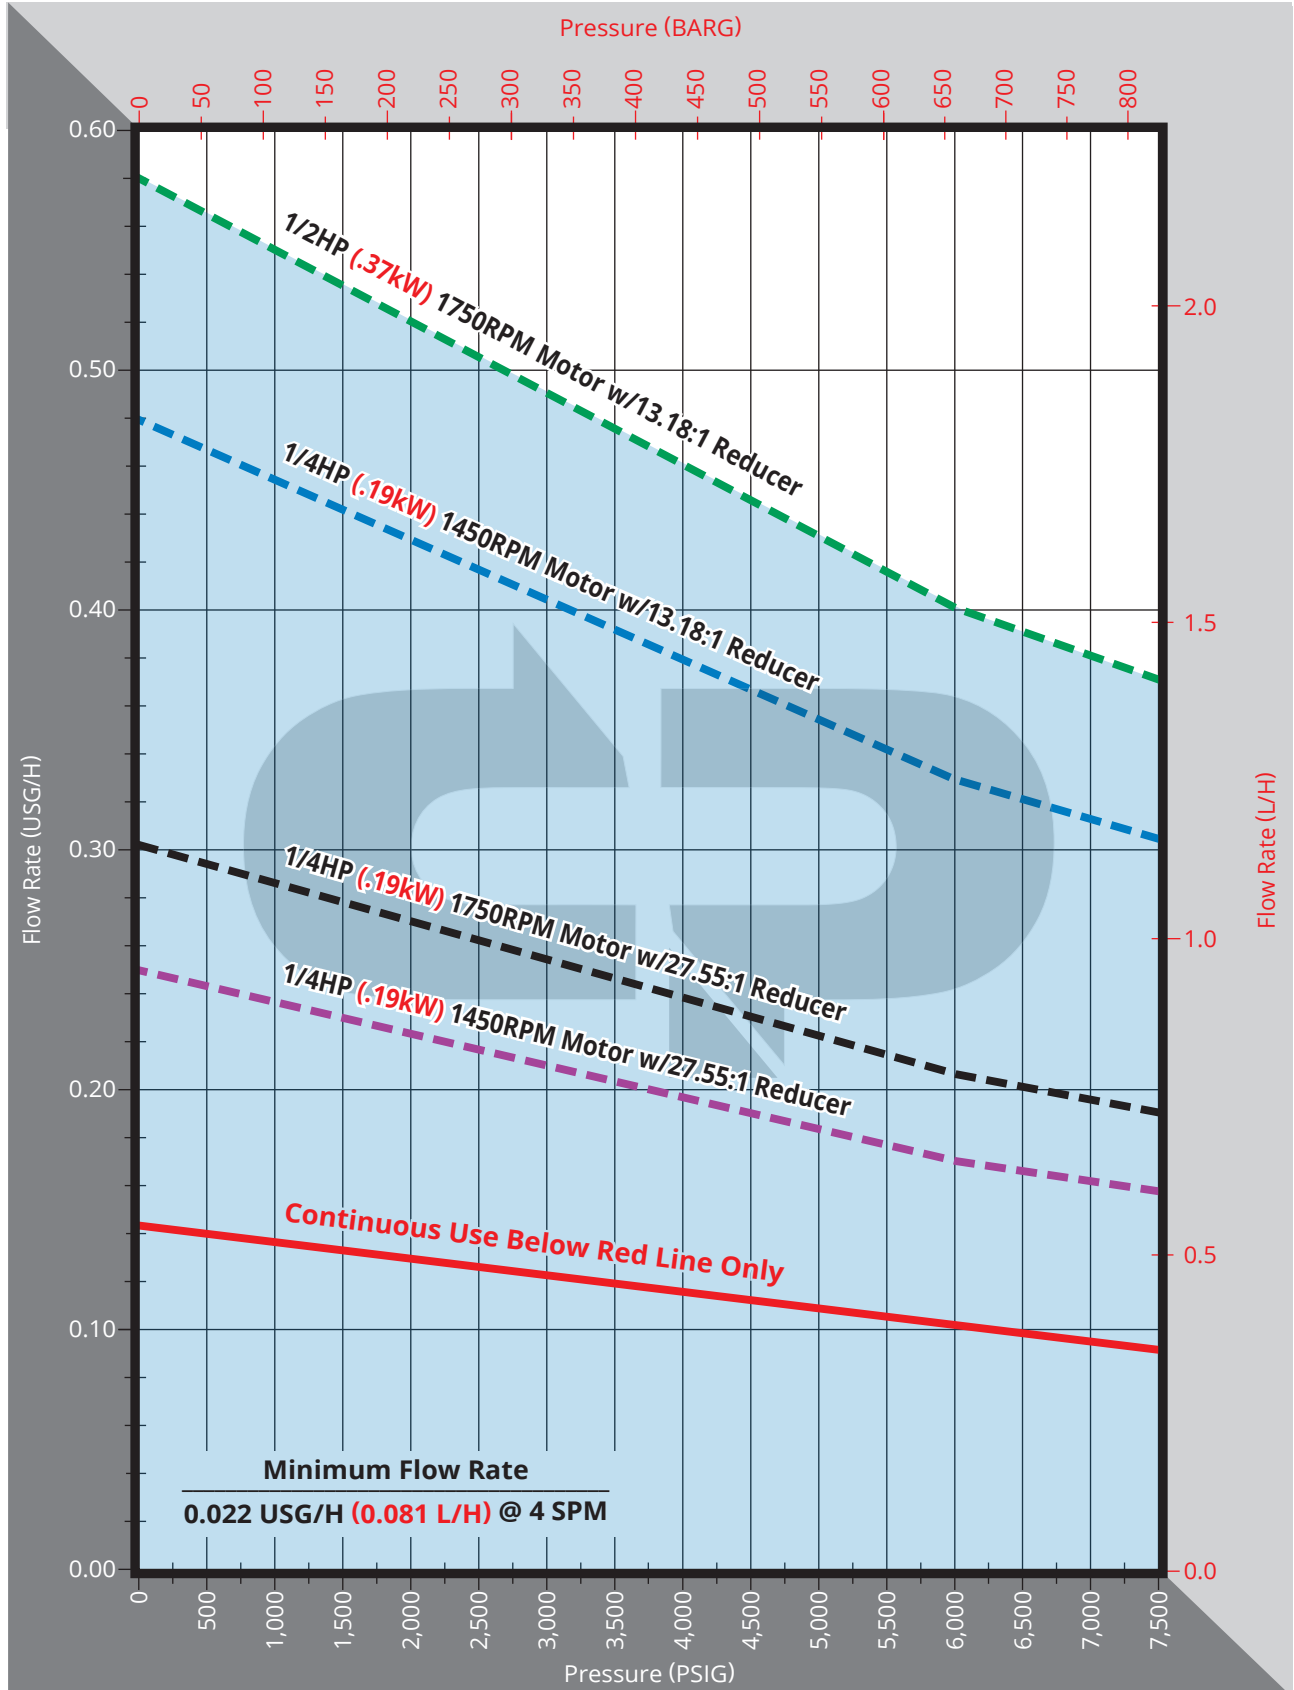


MAWP 7,500 PSIG (517.2 BARG) Metallic Head / 300 PSIG (20.7 BARG) PVC Head / 2,000 lbf (8.90 kN) Rod Force / 0.75 in (19.05 mm) Stroke Length / Motor Requirements: Inverter Duty 1000:1, Vertical / Available Frames: NEMA 56C with 7/8" shaft adapter, 143/145TC or IEC80B5. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. The metallic head version of this model features a modular head design that allows interchangeability with other plunger sizes with the appropriate parts.

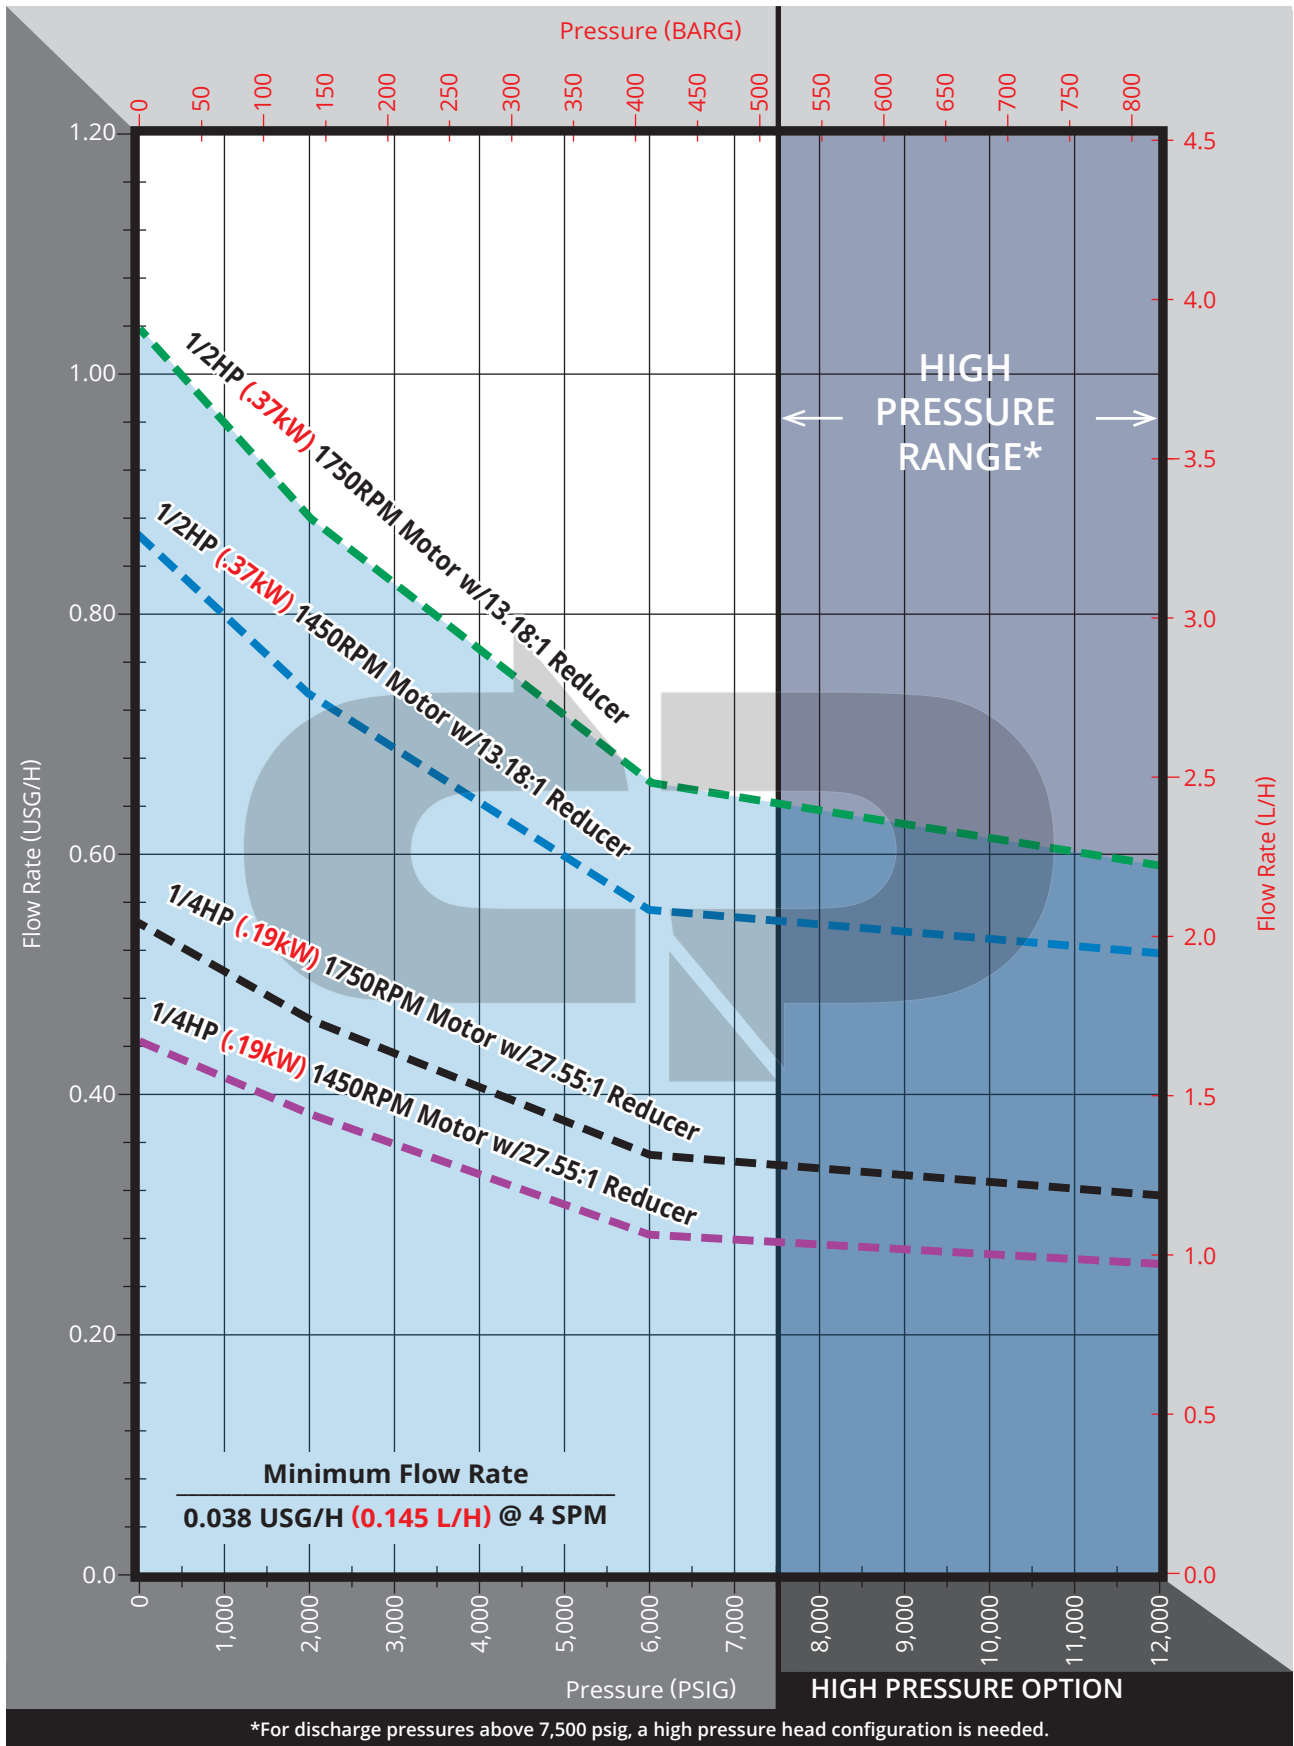


*For discharge pressures above 7,500 psig, a high pressure head configuration is needed.


MAWP 7,500 PSIG (517.2 BARG) Metallic Head / 300 PSIG (20.7 BARG) PVC Head / 12,000 PSIG (827.6 BARG) HP Metallic Head / 2,000 lbf (8.90 kN) Rod Force / 0.75 in (19.05 mm) Stroke Length / Motor Requirements: Inverter Duty 1000:1, Vertical / Available Frames: NEMA 56C with 7/8" shaft adapter, 143/145TC or IEC80B5. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. The metallic head version of this model features a modular head design that allows interchangeability with other plunger sizes with the appropriate parts. High pressure model pump heads are dedicated and do not accept other size plungers.

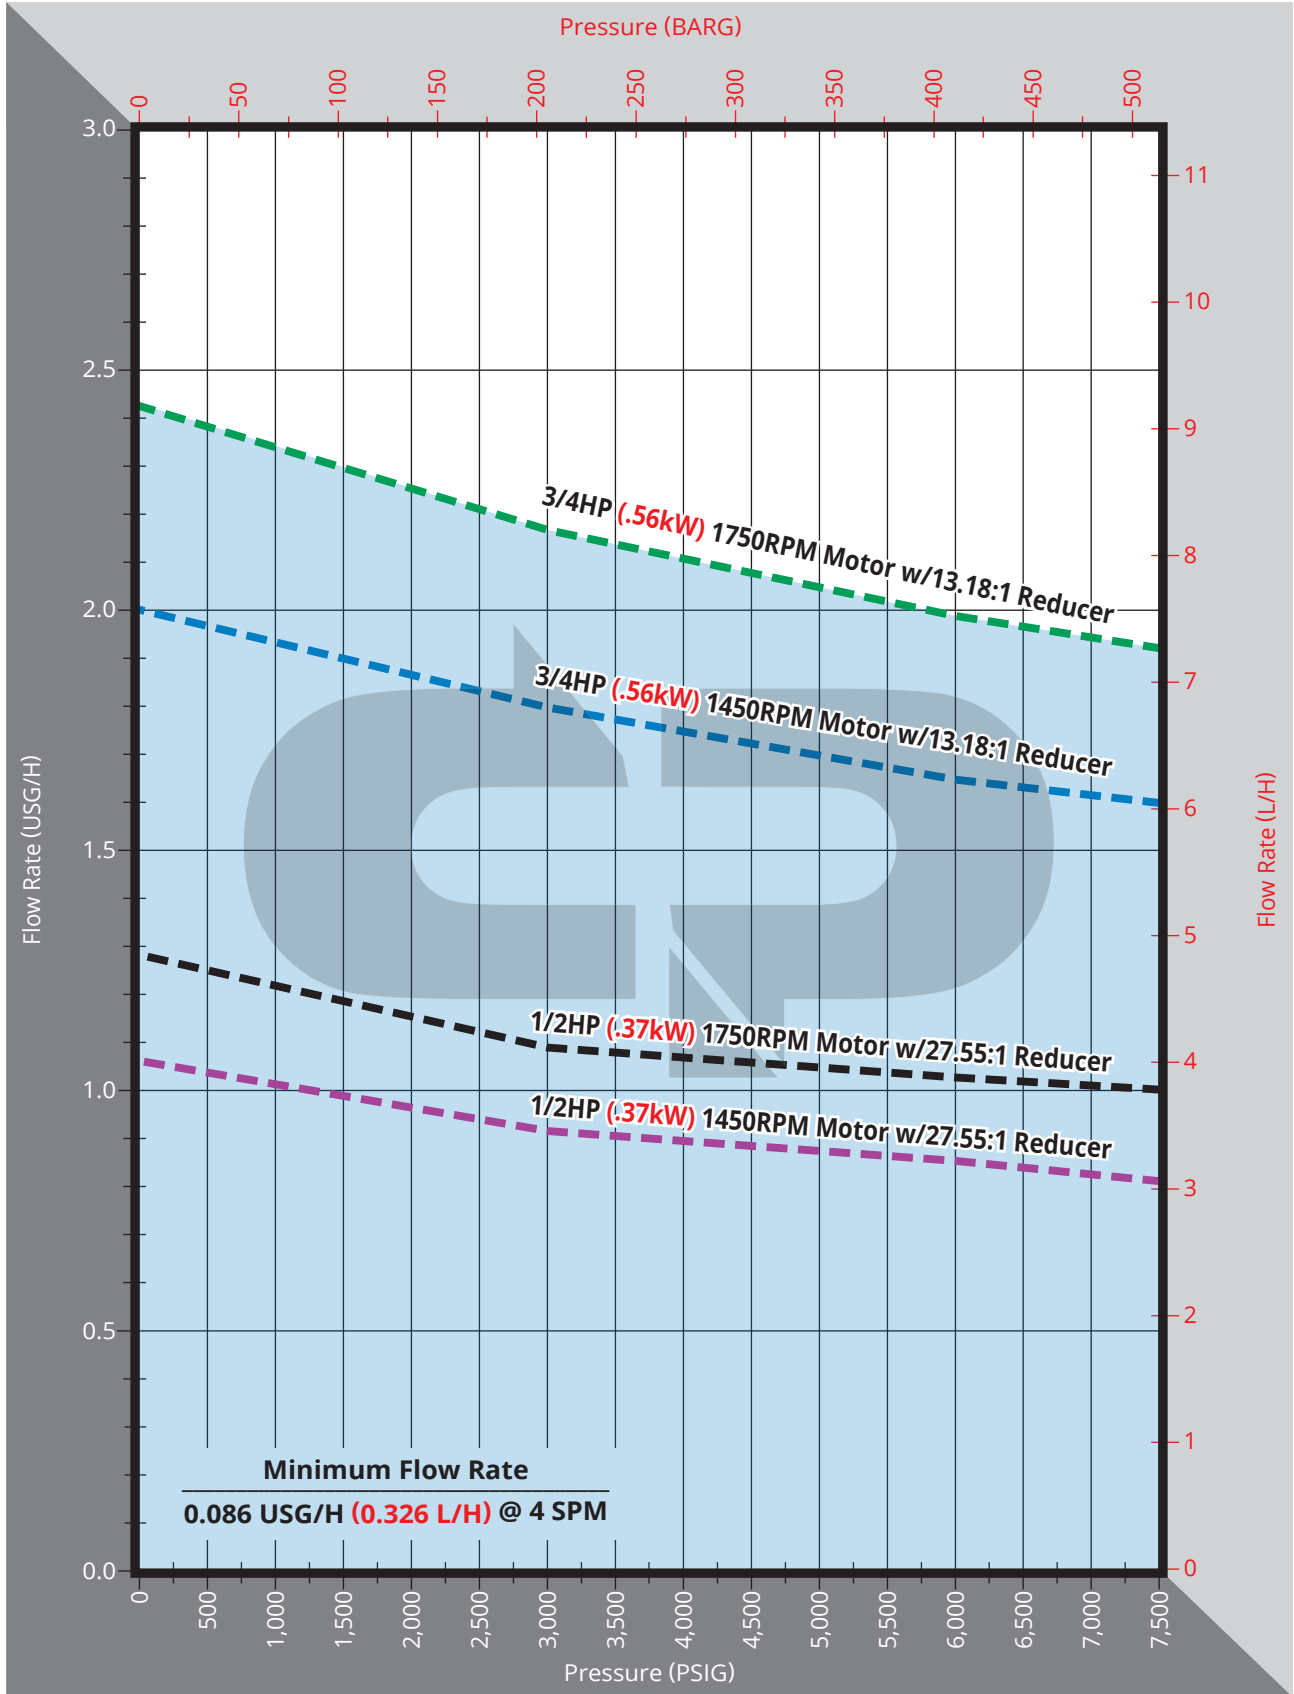


MAWP 7,500 PSIG (517.2 BARG) Metallic Head / 300 PSIG (20.7 BARG) PVC Head / 2,000 lbf (8.90 kN) Rod Force / 0.75 in (19.05 mm) Stroke Length / Motor Requirements: Inverter Duty 1000:1, Vertical / Available Frames: NEMA 56C with 7/8" shaft adapter, 143/145TC or IEC80B5. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. The metallic head version of this model features a modular head design that allows interchangeability with other plunger sizes with the appropriate parts.

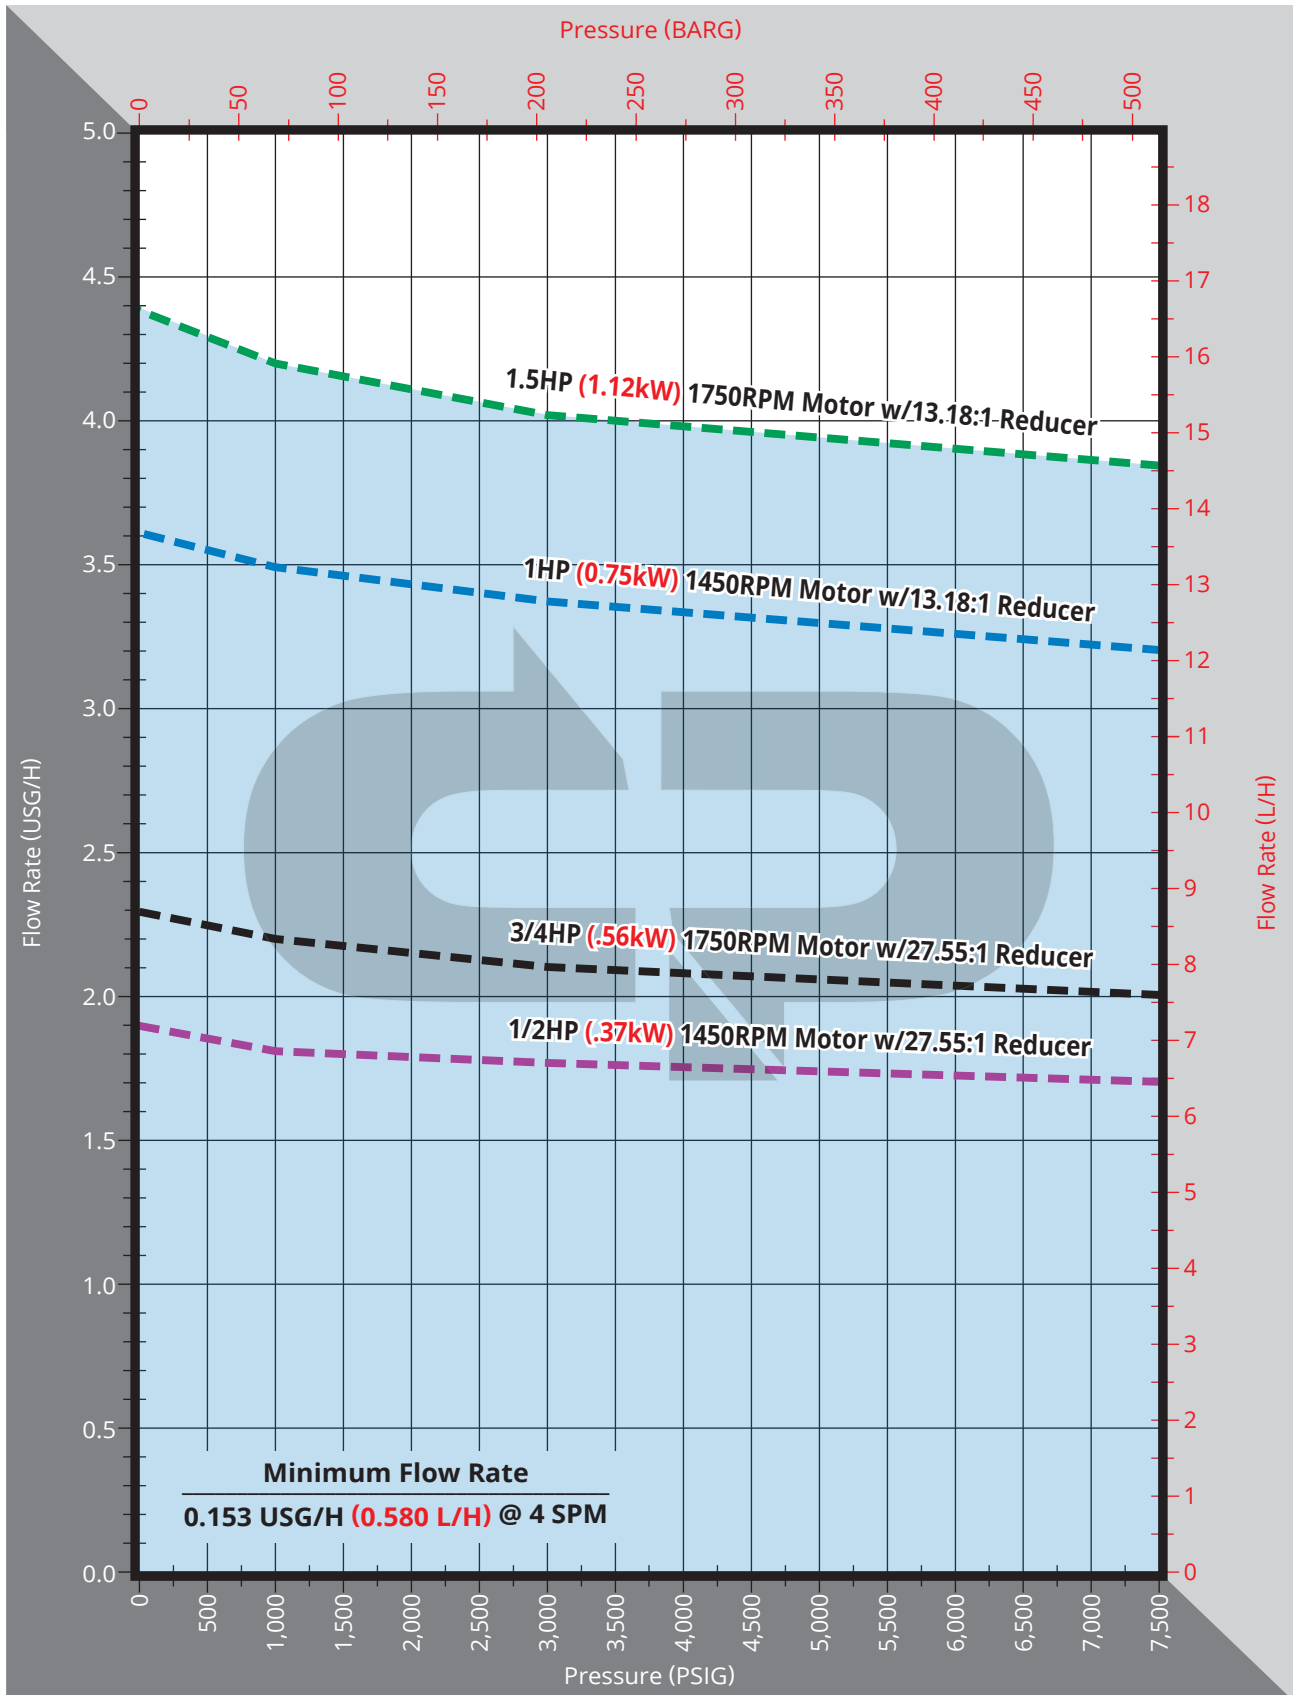


MAWP 7,500 PSIG (517.2 BARG) Metallic Head / 300 PSIG (20.7 BARG) PVC Head / 2,000 lbf (8.90 kN) Rod Force / 0.75 in (19.05 mm) Stroke Length / Motor Requirements: Inverter Duty 1000:1, Vertical / Available Frames: NEMA 56C with 7/8" shaft adapter, 143/145TC or IEC80B5. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. The metallic head version of this model features a modular head design that allows interchangeability with other plunger sizes with the appropriate parts.

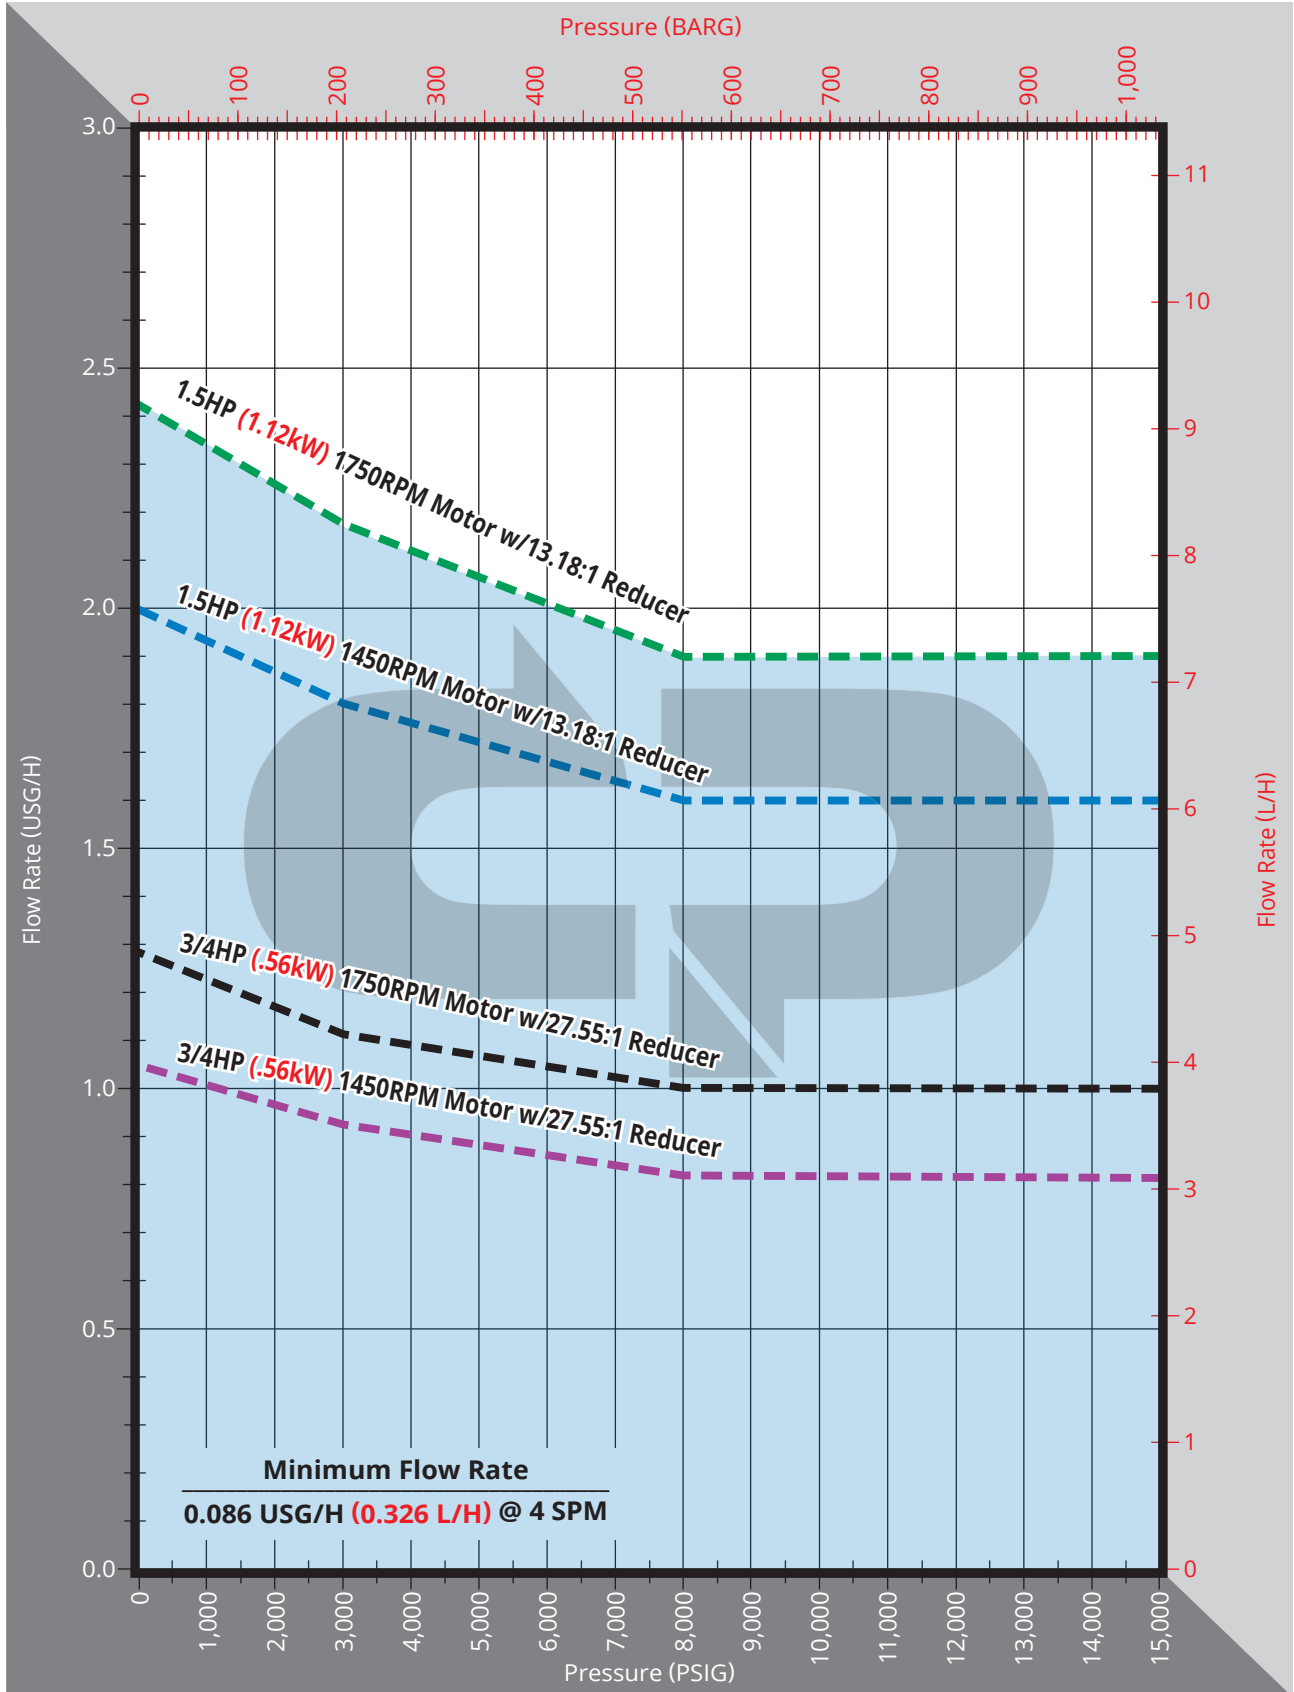


MAWP 15,000 PSIG (1,034.2 BARG) HP Metallic Head / 2,000 lbf (8.90 kN) Rod Force / 0.75 in (19.05 mm) Stroke Length / Motor Requirements: Inverter Duty 1000:1, Vertical / Available Frames: NEMA 56C with 7/8" shaft adapter, 143/145TC or IEC80B5. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. High pressure model pump heads are dedicated and do not accept other size plungers.

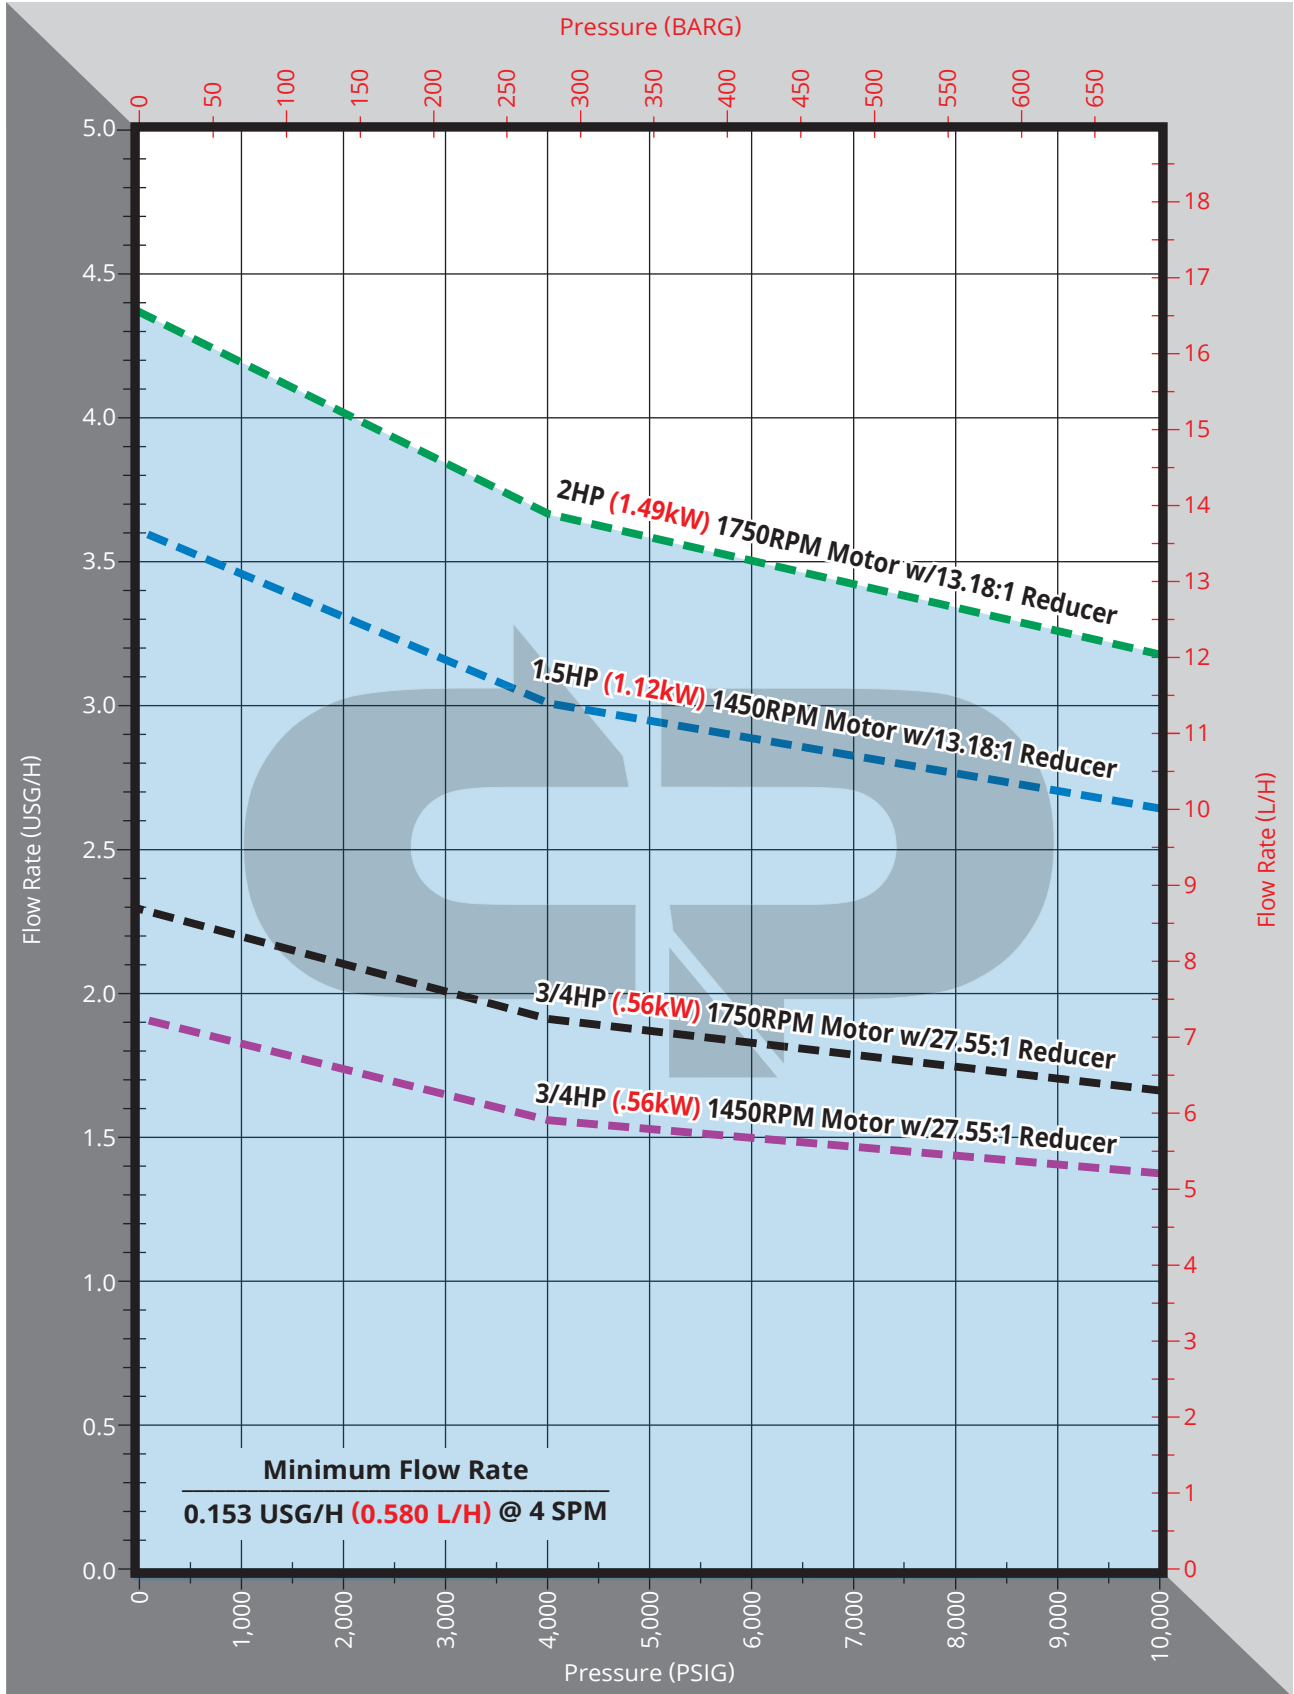


MAWP 10,000 PSIG (689.5 BARG) HP Metallic Head / 2,000 lbf (8.90 kN) Rod Force / 0.75 in (19.05 mm) Stroke Length / Motor Requirements: Inverter Duty 1000:1, Vertical / Available Frames: NEMA 56C with 7/8" shaft adapter, 143/145TC or IEC80B5. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. The metallic head version of this model features a modular head design that allows interchangeability with other plunger sizes with the appropriate parts. High pressure model pump heads are dedicated and do not accept other size plungers.

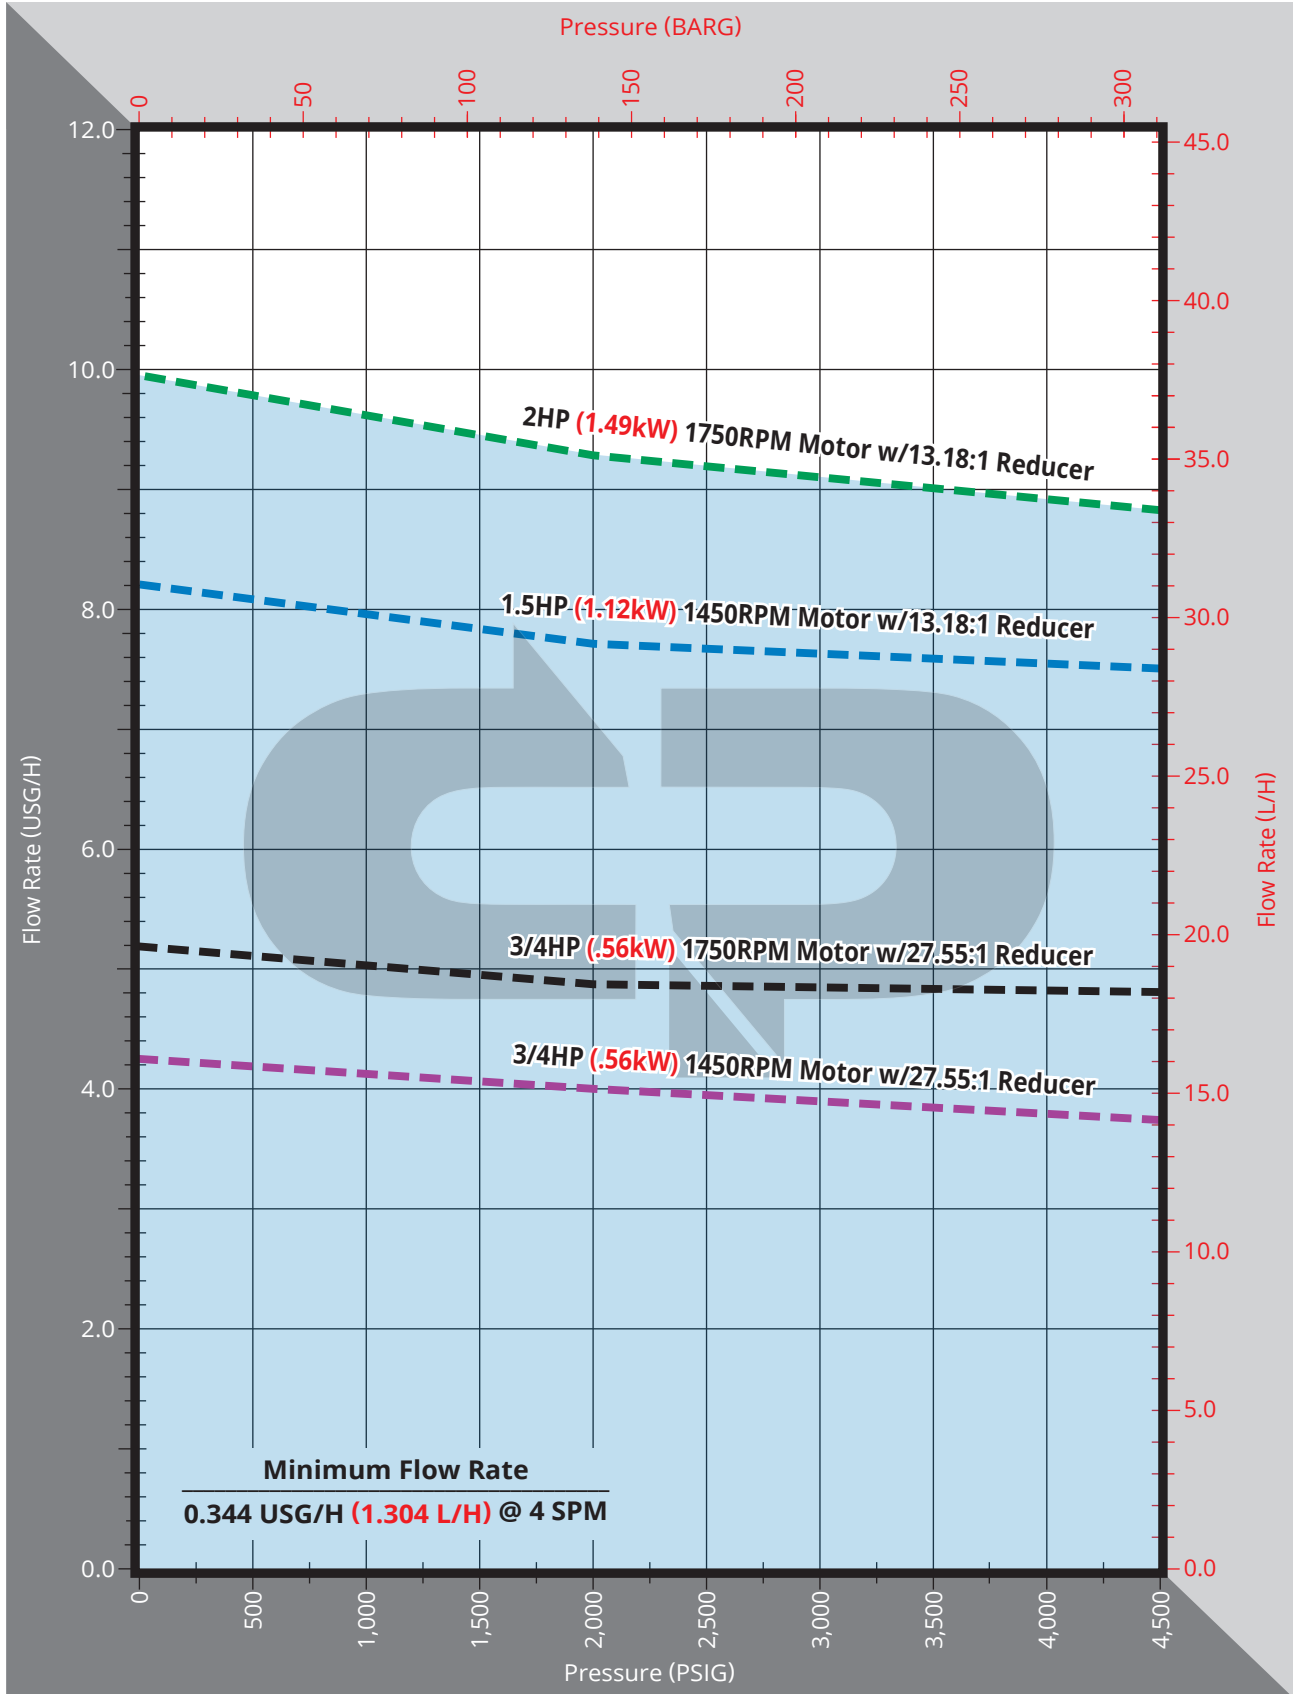

MAWP 4,500 PSIG (310.3 BARG) Metallic Head / 300 PSIG (20.7 BARG) PVC Head / 2,000 lbf (8.90 kN) Rod Force / 0.75 in (19.05 mm) Stroke Length / Motor Requirements: Inverter Duty 1000:1, Vertical / Available Frames: NEMA 56C with 7/8" shaft adapter, 143/145TC or IEC80B5. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. The metallic head version of this model features a modular head design that allows interchangeability with other plunger sizes with the appropriate parts.

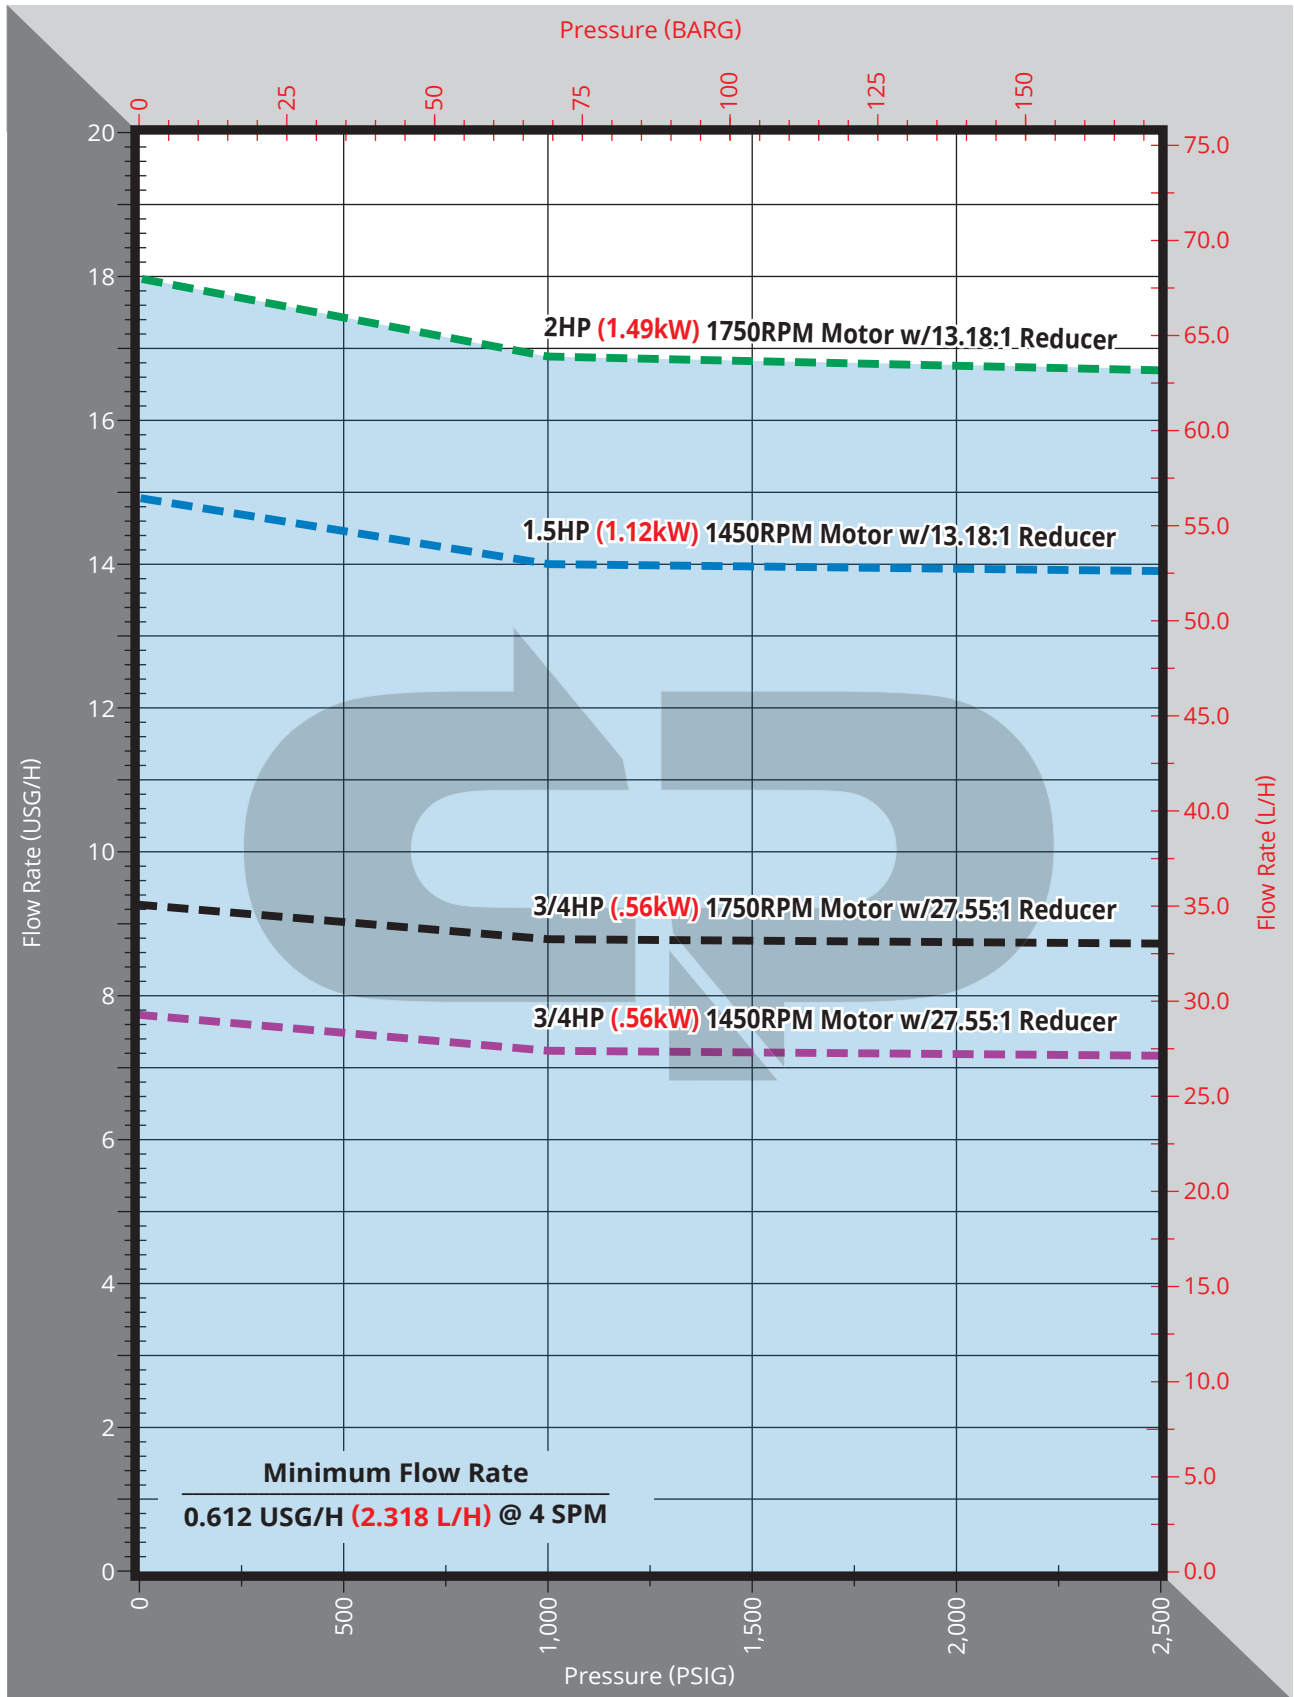

MAWP 2,500 PSIG (172.4 BARG) Metallic Head / 300 PSIG (20.7 BARG) PVC Head / 2,000 lbf (8.90 kN) Rod Force / 0.75 in (19.05 mm) Stroke Length / Motor Requirements: Inverter Duty 1000:1, Vertical / Available Frames: NEMA 56C with 7/8" shaft adapter, 143/145TC or IEC80B5. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. The metallic head version of this model features a modular head design that allows interchangeability with other plunger sizes with the appropriate parts.

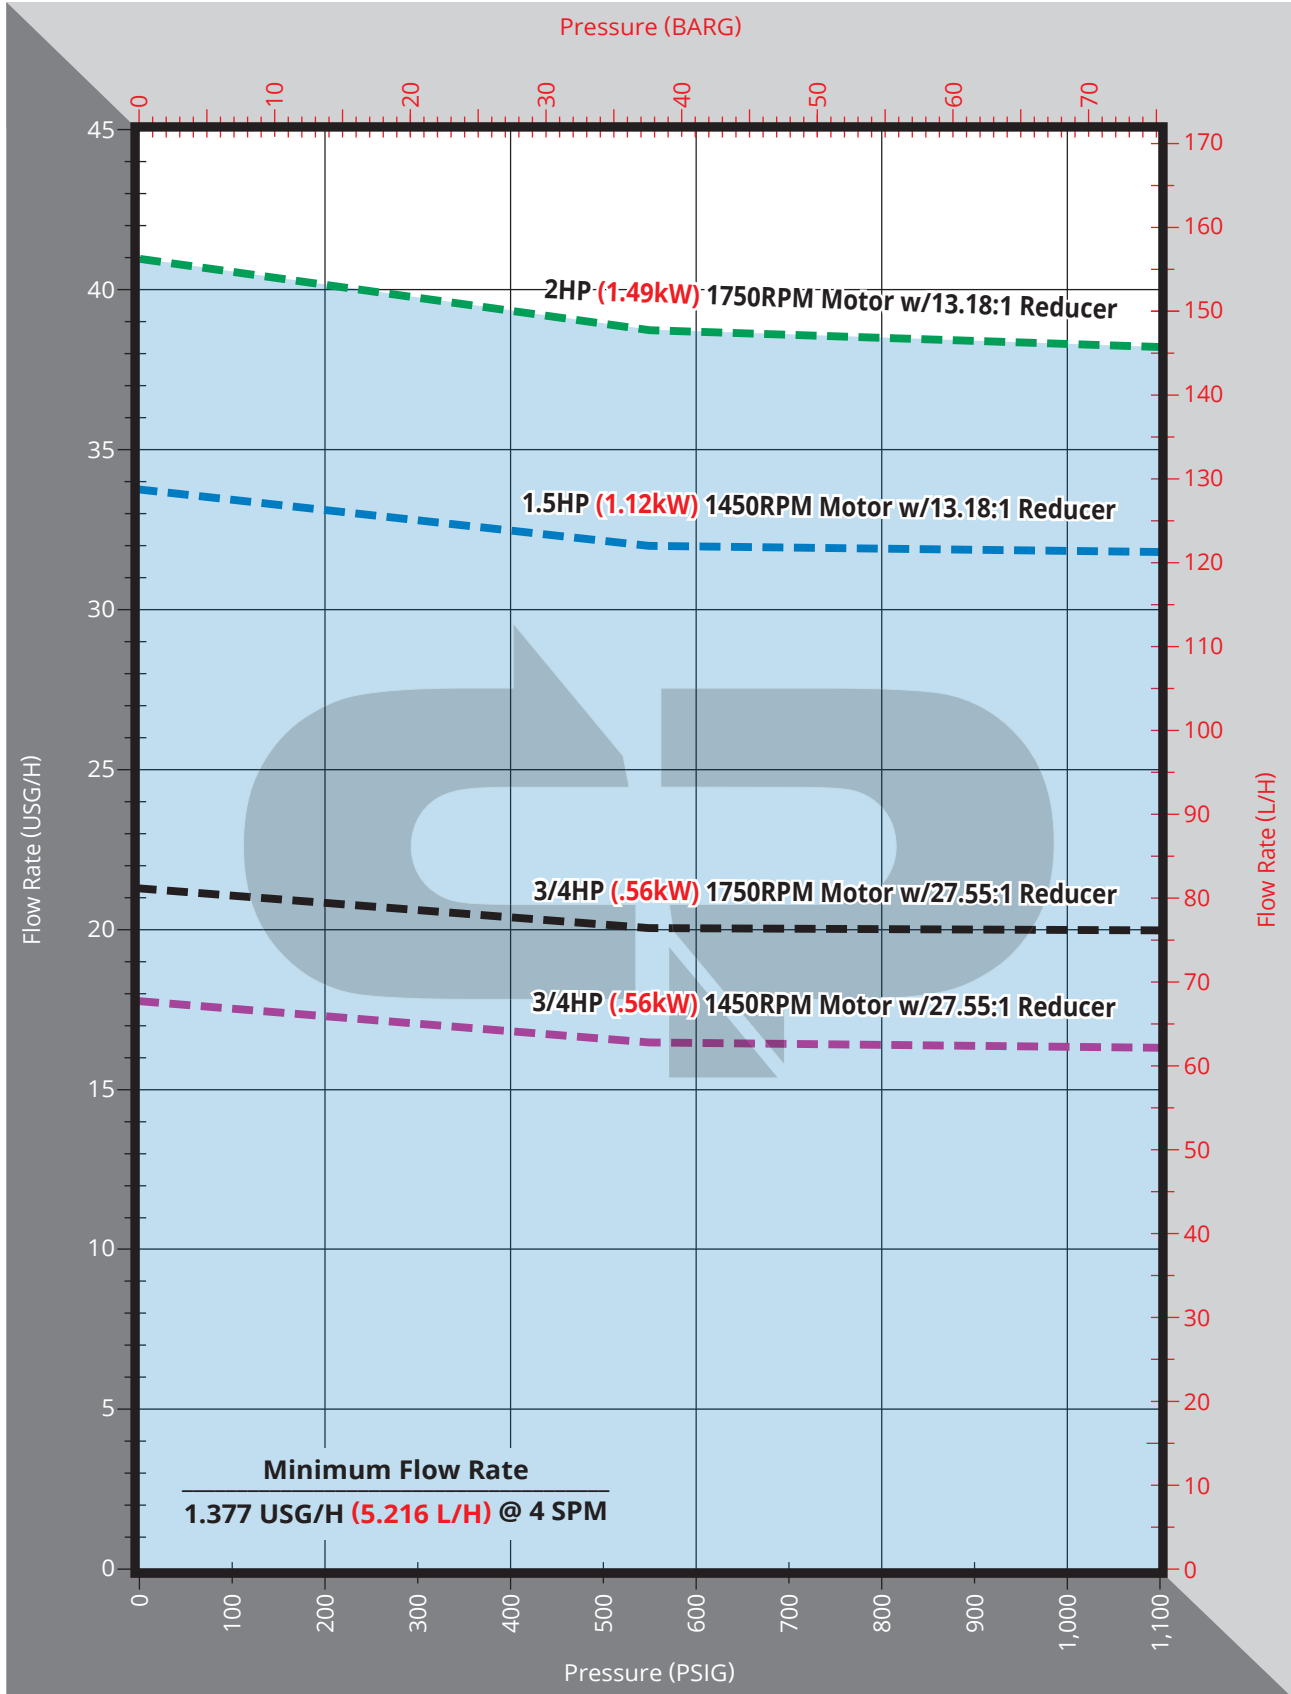

MAWP 1,100 PSIG (75.8 BARG) Metallic Head / 2,000 lbf (8.90 kN) Rod Force / 0.75 in (19.05 mm) Stroke Length / Motor Requirements: Inverter Duty 1000:1, Vertical / Available Frames: NEMA 56C with 7/8" shaft adapter, 143/145TC or IEC80B5. This performance curve was generated with empirical data, supersedes calculated or theoretical table data, and should be used to select an appropriate model. Performance could vary slightly based on field conditions and actual motor speed. The 1.5" model pump head is dedicated and does not accept other size plungers.